


maxiBOX – THE COMFORT DEEP BEDDED CUBICLE

maxiBOX
4-component system



- | **THICKNESS**
ca. 3 cm
- | **SURFACE**
U-shaped profiling
- | **LOWER SIDE**
air cushions

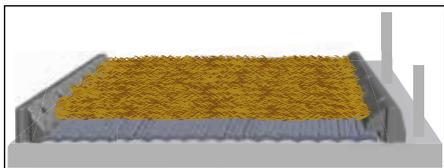

- > Year-round functional safety and consistent comfort
- > Elastic edges in the front and in the back
- > Drainage system promotes hygiene

↓ LESS BEDDING & ↓ LESS LABOUR
compared to classic deep bedded cubicle

maxiBOX



4-component system

| maxiLONGLINE – rubber matting (roll)

- › permanent softness through a pliant air cushion profile on the lower side
- › U-shaped surface profiling retains bedding especially well
- › integrated slope at the rear, as well as drainage grooves and openings, facilitate liquid drainage flow



integrated drainage at the rear

| maxiBOARD – rubber brisket board

- › animal-friendly, elastic and robust
- › easy to put in bedding from the head space

| maxiSTEP – rubber bar at rear

- › elastic and ergonomically chamfered for comfortable lying down and lying
- › integrated drainage openings


| maxiPROFIL XL – bar at side as side lying area boundary

- › reduces slippage of bedding



Recommended bedding depth: ca. 3 - 5 cm

DIMENSIONS

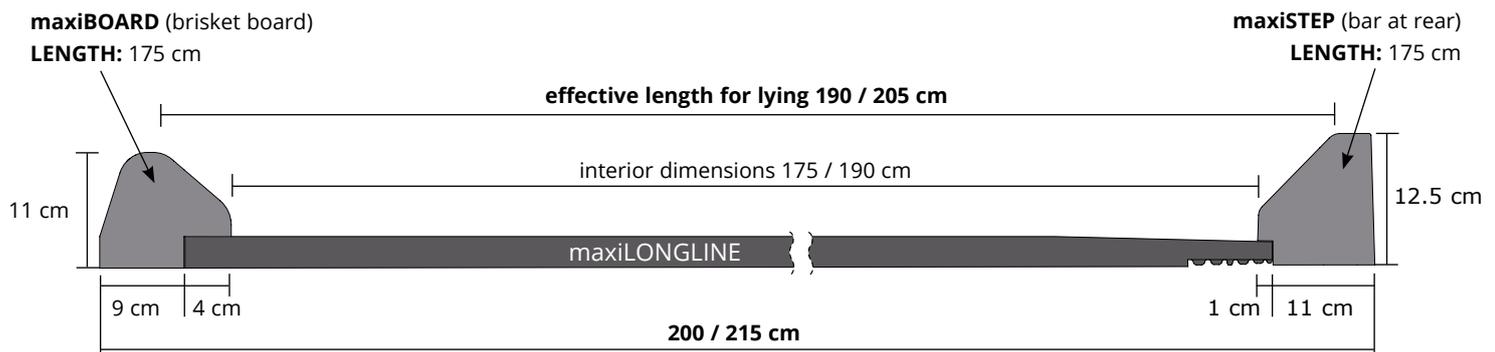

maxiLONGLINE (rubber matting)

THICKNESS	LENGTH	WIDTH
ca. 3 cm	2.5 - 50 m in 10 cm increments	180/195 cm (special dimensions on request)

maxiPROFIL XL

(for the side lying area boundary on maxiLONGLINE, for closure at side edges, for covering joints)

LENGTH: 173 cm, **WIDTH:** 13 cm, **HEIGHT:** 8 cm (note: use maxiPROFIL 4.5 cm high for Switzerland!)



PREREQUISITES FOR THE CONCRETE SURFACE

- › min. 3 % slope
- › ca. 10 cm high

INSTALLATION

- › 7 fixings / maxiBOARD and maxiSTEP
- › maxiLONGLINE is fixed with maxiBOARD at the same time on the concrete floor
- › 5 screws / maxiPROFIL XL

Your KRAIBURG dealer:



Please take notice of the corresponding KRAIBURG specifications and installation instructions with useful advice and tips. You will obtain these at your local KRAIBURG dealer or at www.kraiburg-elastik.com.



The products presented here should only be used for the mentioned applications. Technical specifications are subject to alterations. Tolerances see www.kraiburg-elastik.com. All sales are subject to our General Terms and Conditions. Legal basis is the German version of the document.